


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/22, H04M 3/50		A1	(11) International Publication Number: WO 97/16935
			(43) International Publication Date: 9 May 1997 (09.05.97)
(21) International Application Number: PCT/US96/17245 (22) International Filing Date: 30 October 1996 (30.10.96) (30) Priority Data: 08/552,003 2 November 1995 (02.11.95) US (60) Parent Application or Grant (63) Related by Continuation US 08/552,003 (CON) Filed on 2 November 1995 (02.11.95)		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(71) Applicant (for all designated States except US): ERICSSON INC. [US/US]; 1 Triangle Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): MÖLNE, Anders, Lennart [SE/US]; 5148 Fairmead Circle, Raleigh, NC 27613 (US). (74) Agents: BIGEL, Mitchell, S. et al.; Bell, Seltzer, Park & Gibson, P.O. Drawer 34009, Charlotte, NC 28234 (US).		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: NETWORK DIRECTORY METHODS AND SYSTEMS FOR A CELLULAR RADIOTELEPHONE**(57) Abstract**

In a method of storing directory information in a cellular radiotelephone, the cellular radiotelephone system is provided with a network directory database including a plurality of telephone numbers. The user is prompted for the input of search criteria, and the input search criteria is accepted. A search request data signal is generated in response to the input search criteria, and this signal is sent to the cellular system. The network directory database is searched for a match with the search criteria, and one or more telephone numbers can be identified. These telephone numbers are returned to the radiotelephone and stored in a memory of the radiotelephone. This method eliminates the need to interact with a directory assistance operator and reduces the time of connection between the radiotelephone and the cellular system.

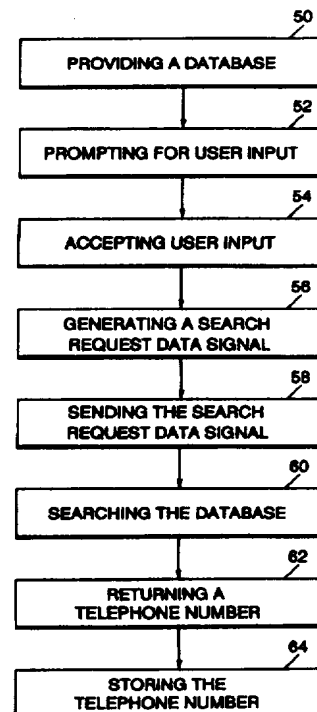

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

-1-

NETWORK DIRECTORY METHODS AND SYSTEMS
FOR A CELLULAR RADIOTELEPHONE

Field of the Invention

The present invention relates generally to cellular radiotelephone communications, and more particularly to directory assistance for radiotelephone
5 communications.

Background of the Invention

As with conventional wire telephones, the user of a conventional cellular radiotelephone must know the telephone number of the party to be called.
10 In a conventional cellular radiotelephone system, a user who does not know the number of the party to be called can place a call to a directory assistance operator. The directory assistance operator answers the call and uses the name of the party to be called
15 (and possibly other information such as the address) to find the desired telephone number. The telephone number is then communicated verbally back to the user over the cellular radiotelephone.

This system has the drawback that the user
20 must either remember the number or write it down, and then enter the number into the radiotelephone when placing the call. The writing down of the telephone number may be particularly difficult when using a cellular radiotelephone in a mobile environment such as
25 in a car. Furthermore, the user must repeat this process or remember the number the next time a call is made to the same number.

A directory assistance call completion ("DACC") service is discussed in U.S. Patent No.
30 5,399,352 entitled "Directory Assistance Call Completion Via Mobile Systems." A cellular user can use the system by dialing the directory assistance

-2-

number, conversing with the operator to obtain the listing, and then dialing "1" to request actual completion. Accordingly, the DACC service eliminates the need for the subscriber to memorize or write down
5 and then dial a telephone number received during a directory assistance call which can be particularly difficult and potentially hazardous while driving.

The published PCT application entitled "Telecommunications System" (Publication No.
10 WO 94/30023) relates to a global mobile telephone network in which each subscriber unit includes a Subscriber Identity Module. In this system, it is possible to obtain a telephone or fax number from the operator-assisted directory enquiries without the
15 subscriber having to manually enter the number into the communications terminal. To use this feature, the subscriber calls network directory inquiries and gives the name of the person, company or service of which he wishes to ascertain the telephone number, as well as
20 any additional information requested by the operator. The operator then locates the number, confirms it and inquires as to whether the number is to be transmitted verbally, transferred over SMS into a given memory location of the subscriber's SIM card or both.

25 If the subscriber chooses an SIM update, the voice call is terminated and the operator initiates the SMS process by entering a sequence into a computer or pressing a dedicated button. The telephone number is then encoded into an ECS message at the dispatch center
30 and is posted across the network to the subscriber's communications terminal, which transmits a confirmation to the dispatch center. Subsequently, the subscriber attempts to place a call to the number in the known memory location by keying in the memory location
35 number. The SIM card passes the telephone or fax number to the communications terminal on demand. Upon receipt of the subscriber's confirmation, the

-3-

communications terminal sets up the call to the desired number.

Notwithstanding the above mentioned references, there continues to exist a need in the art
5 for improved cellular radiotelephones, methods, and systems which provide automated access to a network directory.

Summary of the Invention

It is therefor an object of the present
10 invention to provide improved cellular radiotelephones, methods, and systems.

It is another object of the present invention to provide automated access to a cellular radiotelephone system network directory.

15 These and other objects are accomplished according to the present invention by providing a network directory database in a cellular radiotelephone system which can be accessed automatically from a remote cellular radiotelephone without requiring the
20 intervention of a directory assistance operator. In particular, the user can be prompted for search criteria by a visual display on the radiotelephone, and the input search criteria can be sent to the cellular system as part of a search request data signal. This
25 data signal is used to search the database, and telephone numbers matching the search criteria are returned to the radiotelephone.

In addition, information such as names and/or addresses corresponding to the identified telephone
30 numbers can also be returned and displayed. The telephone number (or numbers) returned can be stored in a personal directory within the radiotelephone and retrieved at a later time. Accordingly, the radiotelephone user can retrieve telephone numbers from
35 the cellular system without interacting with a directory assistance operator. In addition, the number

-4-

can automatically be stored in a memory of the radiotelephone eliminating the need to remember or write down a number retrieved from the directory.

In one embodiment of the present invention, a method of storing directory information in a cellular radiotelephone includes the following steps. A cellular radiotelephone system is provided with a network directory database including a plurality of telephone numbers. The user is prompted for input of search criteria, and the input search criteria is accepted. The prompt can be provided through a visual display on the radiotelephone, and the input search criteria can be accepted by a keypad. A search request data signal is generated within the cellular radiotelephone in response to the search criteria, and this search request data signal is preferably an electronic data signal including the search criteria.

The search request data signal is sent from the cellular radiotelephone to the cellular radiotelephone system, and the network directory database is searched for a match with the search criteria in order to identify a subset of the plurality of telephone numbers. The identified subset of telephone numbers is returned to the cellular radiotelephone, and stored in a memory of the cellular radiotelephone.

The network directory database can further include a plurality of search terms wherein each of the telephone numbers is associated with a respective search term. In this example, the network directory database is searched by comparing at least a portion of the search request data signal with the search terms, choosing a subset of the plurality of search terms which match the portion of the search request data signal, and identifying a subset of the plurality of telephone numbers associated with the chosen subset of the plurality of search terms. Accordingly, the search

-5-

can be based on one or more of names, initials, or addresses. In addition, the chosen search terms can also be returned to the cellular radiotelephone and displayed to the user.

5 An individual telephone number can also be selected from the subset of telephone numbers returned to the radiotelephone, and stored in a personal directory in the cellular radiotelephone. A cellular radiotelephone communication can then be placed using
10 the individual telephone number.

 In another embodiment of the present invention, a cellular radiotelephone can initiate a search of a network directory database and receive telephone numbers from the network directory database.
15 This radiotelephone includes a memory which can be used to store telephone numbers received from the network directory database. This radiotelephone also includes prompting means for prompting a user of the radiotelephone to enter input search criteria, and
20 accepting means for accepting the input search criteria. The prompting means can be a visual display such as an LCD display on the radiotelephone or audible prompting instructions, and the accepting means can be a keypad or other user input device such as a touch
25 screen or a voice activated input.

 The radiotelephone includes generating means, such as a microprocessor, for generating a search request data signal within the cellular radiotelephone in response to the input search criteria. This search
30 request data signal comprises a first electronic data signal including the search criteria. Transmission means, such as a transmitter, transmits the search request data signal from the radiotelephone to a cellular radiotelephone system where at least a portion
35 of the search request data signal is compared with a network directory database in order to identify at least one telephone number.

-6-

Reception means, such as a receiver, receives a return data transmission from the cellular radiotelephone system. This return data transmission comprises a second electronic data signal including the telephone number. The radiotelephone also includes storage means for storing the telephone number in the memory of the cellular radiotelephone. The radiotelephone can also include calling means for establishing a cellular radiotelephone communication using the telephone number in the memory. For example, a dedicated function key can be used to initiate the call using the received telephone number.

The return data transmission can also include a plurality of telephone numbers, and these numbers can all be stored in the memory. In addition, the network directory database can include a plurality of search terms wherein each of the search terms is associated with a respective telephone number. In this case, the search request data signal can be compared with the search terms to locate desired telephone numbers. Furthermore, the search terms associated with each of the returned telephone numbers can be included in the return data transmission and stored in the memory location. Accordingly, a display, such as a visual display, can be used to display the telephone numbers in the memory as well as the respective search terms.

After viewing the telephone numbers in the memory, designation means, such as a dedicated function key, can be used to designate one of the telephone numbers and store it in a personal directory in the radiotelephone. Calling means, such as another dedicated function key, can be included on the radiotelephone to establish a radiotelephone communication using the designated telephone number.

In still another embodiment of the present invention, a cellular radiotelephone system includes a network directory database comprising a plurality of

-7-

telephone numbers. The cellular system includes reception means, such as a receiver, for receiving a search request data signal from a cellular radiotelephone. This search request data signal
5 comprises a first electronic data signal including search criteria generated by the cellular radiotelephone in response to prompts for user input followed by user input of the search criteria. The cellular system also includes search means (such as a
10 general purpose computer with special purpose software, a special purpose computer, or special purpose hardware) for searching the network directory database for a match with the search criteria in order to identify a subset of the plurality of the of telephone
15 numbers. Finally, the cellular system includes transmission means, such as a transmitter, for transmitting a second electronic data signal including the subset of telephone numbers to a memory of the cellular radiotelephone.

20 Accordingly, the methods, radiotelephones, and systems of the present invention allow the user of a cellular radiotelephone to access a network directory without the intervention of a directory assistance operator. The user can be provided with visual prompts
25 and enter search criteria in response to these prompts. The remainder of the search can be automated requiring no further action from the user. In fact, the telephone number can be located and returned to the radiotelephone where it is automatically stored in a
30 memory location. Once the telephone number is stored in the telephone, the user can view it on a visual display and place a call using the number by pressing a dedicated function key.

The invention allows directory assistance
35 service to be provided while reducing the connection time required between the radiotelephone and the cellular system. This reduction in connection time is

-8-

achieved because one data message from the radiotelephone to the cellular system can be used to initiate the service, and one data message from the cellular system to the cellular phone can be used to transmit the telephone number or numbers. Accordingly, the cost of directory assistance can be reduced for a cellular radiotelephone.

Brief Description of the Drawings

Figure 1 is a schematic view of an analog cellular radiotelephone and system including an integrated network directory database.

Figure 2 is a schematic view of an analog cellular radiotelephone and system including an add-on network directory database.

Figure 3 is a schematic view of a digital cellular radiotelephone and system including an integrated network directory database.

Figure 4 is a schematic view of a digital cellular radiotelephone and system including an add-on network directory database.

Figure 5 is a block diagram illustrating the storage of directory information in a cellular radiotelephone according to the present invention.

Detailed Description of Preferred Embodiments

The present invention will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those having skill in the art. Like numbers refer to like elements throughout.

-9-

Referring now to Figure 1, an analog cellular system **10a**, according to the present invention, includes one or more radio base stations ("RBS") **12a** and a Mobile Switching Center ("MSC") **14a**, also known as a mobile telephone switching office. This cellular system can be implemented according to various analog protocols including AMPS, TACS, and NMT. In normal operation, the analog cellular system provides cellular radiotelephone communications to and from one or more cellular radiotelephones **16a** within range of RBS **12a**. This radiotelephone communication is provided over a wireless communication path **18a**. Accordingly, the analog cellular system **10a** can facilitate wireless communications between the illustrated radiotelephone **16a** and a second radiotelephone. In addition, the cellular system is preferably connected to a Public Switched Telephone Network ("PSTN") **20a**, also referred to as the wire telephone network, through the MSC, thereby allowing communication between the radiotelephone **16a** and a conventional telephone. As will be understood by those having skill in the art the term radiotelephone can be defined to include a personal digital assistant, a computer with a wireless modem, or any other device capable of sending and receiving data to and from a wireless communications system.

In particular, the analog cellular system of Figure 1 provides a network directory database **22a** which allows the user of the cellular radiotelephone **16a** to obtain a desired telephone number without requiring interaction with a directory assistance operator. In this system, the user is prompted for search criteria which can be entered by using keypad **24a** on the radiotelephone. The prompts can be provided through a visual display **26a** such as an LCD display or row dot matrix display on the cellular radiotelephone **16a**. Alternatively, the prompts can be provided

-10-

audibly such as through a synthesized voice. The cellular radiotelephone **16a** then generates a search request data signal in response to the input search criteria and this search request data signal can be an
5 electronic data signal including the search criteria.

The search request data signal is sent to the cellular system **10a** which includes a network directory database **22a**. The network directory database **22a** can include information such as telephone numbers and
10 search terms, wherein each of the search terms is associated with a respective telephone number. The network directory database **22a** is searched to find a match with the search criteria in order to identify a telephone number which is returned to the cellular
15 radiotelephone **16a** and stored in a memory therein. Accordingly, the user of the cellular radiotelephone can then place a call using the telephone number in the memory. Furthermore, this telephone number is obtained without going through a directory assistance operator.

20 In the analog cellular system **10a** of Figure 1, the network directory database **22a** is integrated into the system, and this directory is used to provide telephone numbers to cellular radiotelephone users. The network directory database **22a** has information
25 including telephone numbers and search terms wherein each search term is associated with a respective telephone number. Accordingly, by using search criteria such as a last name, a first name, a middle name, an initial, and/or an address, a desired
30 telephone number can be obtained. "Yellow pages" search criteria, which identify a professional classification, may also be used.

As shown, signals from the cellular radiotelephone **16a** pass over the wireless communication
35 path **18a** to the base station **12a** and the MSC **14a**. When having a conventional radiotelephone conversation, a voice channel is established in both directions over

-11-

this wireless communication path and then on to either the PSTN **20a** or to another cellular radiotelephone. When accessing the network directory database, a voice channel is established over the wireless communication
5 path **18a** to the base station **12a**, but the path is diverted at the MSC **14a** to the network directory database **22a**.

The voice channel between the cellular radiotelephone **16a** and the network directory database
10 **22a** is used to send a search request data signal from the radiotelephone to the database, and to return at least one telephone number from the database to the radiotelephone. In both directions, information is sent as a data signal thereby eliminating the need for
15 a directory assistance operator.

The search request data signal can be generated within the cellular radiotelephone **16a** and this search request data signal can be an electronic data signal including search criteria. This data
20 signal can be converted to modem signals for transmission across the voice channel by a modem within the cellular radiotelephone **16a**. The data signals can be sent across the voice channel as DTMF signals or any other analog modem signals known to those having skill
25 in the art.

The modem signals can be converted back to data signals by a modem within the cellular system **10a** and then sent to the database. In one embodiment, a search request data signal is generated within the
30 radiotelephone **16a** and converted to modem signals. These modem signals are then passed over a voice channel from the cellular radiotelephone **16a** to the base station **12a** and then to the MSC **14a** where a second modem converts these modem signals to electronic search
35 request data signals. The search request data signals are then sent to the network directory database **22a** in order to locate a desired telephone number.

-12-

As discussed above, the network directory database **22a** can include a plurality of telephone numbers and a plurality of search terms, wherein each search term is associated with a respective telephone number. For example, each telephone number can have as associated search terms a first name, a last name, a middle name, initials, and/or an address. The search criteria input by the radiotelephone user can include one or more of a first name, a last name, a middle name, an initial, and/or an address. Accordingly, after searching the search terms, matches between the search criteria and the search terms are used to identify telephone numbers associated with the matching search terms. In addition, portions of telephone numbers can be used as search terms.

The identified telephone number (or numbers) are then returned to the cellular radiotelephone **16a** through the MSC **14a** and the base station **12a**. Telephone numbers are returned from the cellular system **10a** over the wireless communication path **18a** as electronic data signals. In particular, the telephone numbers can be sent from the database **22a** to the MSC **14a** as electronic data signals and converted to modem signals by a modem in the MSC **14a**. These modem signals are then sent over the voice channel to the RBS **12a** and then to the cellular radiotelephone **16a**. The modem in the cellular radiotelephone **16a** converts the modem signals to electronic data allowing the telephone number (or numbers) to be stored in a memory within the cellular radiotelephone. Accordingly, the transfer of data to and from the cellular radiotelephone **16a** can take place using a voice channel without using either the speaker or microphone of the radiotelephone.

The stored telephone number or numbers can be displayed on the visual display **26a** allowing the user to decide whether to place a call. For example, the user can view each telephone number returned to the

-13-

radiotelephone and then decide whether to keep or use any of the numbers. Alternately, the telephone numbers can be audibly communicated through a voice synthesizer. Desired numbers can be stored in

5 semipermanent memory in the radiotelephone such as a personal directory within the radiotelephone. A call can be placed using a telephone number stored in the radiotelephone memory or directory by pressing a predetermined function key on the keypad **24a**.

10 In addition, search terms can be returned to the radiotelephone **16a** with the associated telephone number and stored in a memory location within the radiotelephone. For example, a name and/or address can be returned with each telephone number and viewed on
15 the display **26a**. Accordingly, if more than one telephone number is returned, this information can be used to choose the desired telephone number. That is, a name used as a search criteria can identify multiple telephone numbers, but the address may allow the user
20 to pick the one desired number. The desired number and associated search term or terms can then be stored together in a personal directory within the radiotelephone allowing the user to locate the telephone number at a later time without going through
25 the cellular system **10a**.

The user of the cellular radiotelephone **16a** can initiate the search for a telephone number at the network directory database **22a** by pressing a predetermined function key on the radiotelephone keypad
30 **24a**. This action initiates a prompting function within the radiotelephone prompting the user for search criteria. For example, the radiotelephone prompts the user to enter a first name or initial, a last name or initial, a middle name or initial, and an address. The
35 user can skip prompts that ask for information that is not known, and the radiotelephone **16a** generates the search request data signal using all information

-14-

supplied by the user. Depending on the information provided by the user, one or more telephone numbers may be identified. If a manageable number of telephone numbers are identified, they can all be returned to the
5 radiotelephone for the user to choose from.

If too many telephone numbers are identified, a message indicating that too many numbers were identified can be returned. The radiotelephone prompting function can then automatically prompt the
10 user for any search criteria which was not provided in the first search. If more information is provided, then the search can be reinitiated.

Furthermore, the network directory database can be divided into a plurality of subdirectories
15 within the database, each being directed to a subgroup of telephone numbers. For example, different subdirectories can include telephone numbers for a city, a company, and a personal directory. Accordingly, the user can designate the subdirectory to
20 be searched thereby reducing the field of the search. For example, a company can have a subdirectory giving the telephone numbers of its employees. Alternately, each cellular account can have an associated subdirectory wherein telephone numbers chosen by the
25 account user are stored, and this personal subdirectory can be limited to access only by the account user.

The cellular radiotelephone **16a** can prompt the user for input of search criteria by running a prompting routine stored in the cellular radiotelephone
30 **16a**. For example, a function key on the keypad can be used to start an internal program which in turn prompts the radiotelephone user to enter search criteria. Visual prompts can be displayed on the display **26a** and search criteria can be input through the keypad **24a**.
35 After the search criteria has been entered, the prompting routine can generate the search request data

-15-

signal including the search criteria, and this search request data can be sent to the cellular network.

Alternately, the prompting routine can be stored in the cellular system, and the step of

5 prompting for user input of search criteria can occur interactively between the radiotelephone **16a** and the cellular system **10a**. For example, a function key on the radiotelephone **16a** can be used to initiate a data transmission to the cellular system to start the

10 prompting routine. Prompting commands generated by the cellular system are sent to the radiotelephone **16a** via the wireless communication path **18a**. Prompting messages requesting search criteria are displayed on the visual display **26a** and the user responds by

15 depressing appropriate keys on the keypad **24a**. The input search criteria are sent to the cellular system as they are input, and the search can be stopped by the cellular system **10a** when a unique telephone number has been identified. Accordingly, the radiotelephone and

20 the cellular system can communicate back and forth with each prompt and user response allowing interactive searches.

In Figure 2, the network directory database **22b** is implemented outside the analog cellular system

25 **10b**. As before, the cellular radiotelephone transmits and receives information to and from the cellular system **10b** via the wireless communication path **18b** and the RBS **12b**. Again, conventional voice communications can be supported between the radiotelephone **16b** and a

30 second radiotelephone, or a conventional telephone through the PSTN **20b**.

In Figure 2, however, an add-on feature node **21b** outside the analog cellular system **10b** supports the network directory database **22b**. In particular, signals

35 from the cellular radiotelephone **16b** are transmitted over the wireless communications path **18b** to the base station **12b**, the MSC **14b**, and the Central Office Switch

-16-

("COS") **19b**. From the COS **19b**, the signals are sent to the feature node **21b** which supports the network directory data base **22b**. The path from the radiotelephone **16b** to the feature node **21b** can be a
5 conventional analog voice path thereby eliminating the need for any modification to the conventional analog cellular system **10b**.

As before, the radiotelephone **16b** can include a modem to convert search request data signals to modem
10 signals for transmission over this analog voice path. In the cellular system of Figure 2, however, the second modem is included in the feature node **21b** to convert the modem signals back to data signals. The search request data signals can then be sent to the network
15 directory data base **22b** as before. Again a prompting routine can be included in the radiotelephone **16b**, or the prompting routine can be included in the feature node **21b** for interactive prompting between the radiotelephone **16b** and the network directory database
20 **22b**. The network directory database **22b** can also include a plurality of subdirectories as previously discussed.

As an example, access to the network directory database **22b** of Figure 2 can be provided as
25 follows. In response to prompts, the radiotelephone user inputs company directory and the initials "KM" via the keypad **24b**. The cellular radiotelephone **16b** sets up a call to the feature node **21b**, and the feature node answers the call and verifies the radiotelephone **16b**.
30 The feature node **21b** can also signal service messages and ready. The cellular radiotelephone receives the ready signal and then transmits the search request. In this case the search request is for telephone numbers in the company directory belonging to persons with the
35 initials KM. The feature node **21b** acknowledges receipt of the search request data signal and initiates a search in the company subdirectory database. The

-17-

database receives the search request, finds all matches, and sends the result to the feature node. The results are sent by the feature node to the radiotelephone **16b** where they can be displayed. The user can then display the names and telephone numbers located by the network directory database, and store the desired number in the personal directory of the radiotelephone **16b**. The user can also place a call to the desired telephone number. The call can either be set up as a new call or set up through the feature node **21b** as part of the search request.

The network directory database **22c** can also be implemented as an integrated part of a digital cellular system **10c**, as shown in Figure 3. For example, the digital cellular system **10c** can be implemented according to the GSM, D-AMPS, PDC, DCS1800, PCS1900, or CDMA standards. In this system, the digital cellular radiotelephone **16c** can include user interfaces such as a visual display **26c** and a keypad **24c**, as discussed above with regard to the analog systems. Furthermore, the user interfaces of this digital radiotelephone **16c** can be implemented, for example, as a touch screen display or multi-row display operated in conjunction with a keypad.

When the radiotelephone **16c** is used for conventional voice communications, a digital control channel is used to initiate a cellular communication between the cellular radiotelephone **16c** and the RBS **12c** of the digital cellular system **10c**. An exchange over the control channel is used to set up a digital voice channel between the radiotelephone **16c** and the RBS **12c**. This voice channel can support communications between the radiotelephone **16c** and a second radiotelephone or a conventional telephone. For example, to communicate with a conventional telephone, the voice channel crosses from the radiotelephone **16c** to the RBS **12c** over

-18-

the wireless communication path **18c**, to the MSC **14c**, to the PSTN **20c**, and then to a conventional telephone.

When the digital radiotelephone **16c** is used for accessing the network directory database **22c**, a digital control channel can be used to complete the data search without opening a voice channel. For example, the data can be sent using SMS or USSD protocols, or other digital protocols known to those having skill in the art. As shown, a digital control channel can be established between the digital radiotelephone **16c** and the network directory database **22c** through the wireless communication path **18c**, the radio base station **12c**, the MSC **14c**, and the Home Location Register ("HLR") **25c**. Accordingly, a search request data signal can be sent from the digital radiotelephone **16c** to the network directory data base **22c** without the need for special modems in either the radiotelephone **16c** or the cellular system **10c**. The use of a digital control channel to transmit search criteria and results can reduce the air time required to transmit this information, thereby reducing cellular access costs. Alternatively, a dedicated data channel can be established between the radiotelephone and the cellular system allowing a continuous data connection between the radiotelephone and cellular system.

In the digital system of Figure 3, the radiotelephone can include a prompting routine which prompts the user for search request information through the visual display **26c**. The user responds by entering the search request information through the keypad **24c**. This search request information is accepted by the radiotelephone and can be included in a single search request data signal which is sent by a control channel to the network directory database **22c**. Alternately, the prompting routine can be included in the cellular system **10c**, each prompt being generated within the cellular system **10c** and sent over a control channel to

-19-

the radiotelephone 16c where the prompt is communicated through the visual display. With individual prompts from the cellular system, each item of search request information can be individually input through the keypad, accepted by the radiotelephone and sent to the network directory database 22c. Accordingly, the prompting and accepting of search request information can be interactive, allowing the search to be completed as soon as a unique telephone number is identified which can often occur before all information has been prompted for or accepted.

The digital cellular system 10c of Figure 3 can support interactive searches of the network telephone directory 22c using various digital protocols for control channel signaling. For example, in the IS-136 protocol, there is open user specific signaling available in the control channel. Alternately, in the GSM protocol, unstructured supplementary service data ("USSD") is a user specific signaling which can be addressed to different parts of the cellular system 10c such as the RBS 12c, the MSC 14c, or the HLR 25c. Data can also be transmitted as SMS (Short Message Service) data on the control channel. As shown in Figure 3, the search request data signal (or signals) would be addressed to the HLR 25c which has access to the network directory data base 22c. Accordingly, information can be signaled back and forth between the radiotelephone 16c and the digital cellular system 10c.

As an example, a user of the radiotelephone 16c can obtain a telephone number from the network directory database as follows. The user presses a key on the radiotelephone 16c to initiate the search. In response to prompts displayed on the visual display 26c, the user chooses to search the company subdirectory for the telephone number of an individual with the initials "KM", and this information is input

-20-

through the keypad **24c**. The radiotelephone **16c** sends a signal over the control channel to the HLR **25c** to search the company directory for telephone numbers associated with the initials "KM". The HLR identifies
5 and acknowledges the radiotelephone, and starts the search in the company subdirectory within the network directory database **22c**.

The network directory database **22c** receives the search order, conducts the search, and sends the
10 search result to the HLR. The HLR sends the search results to the radiotelephone as a network service data message. As shown, this network service data message is sent from the HLR **25c** through the MSC **14c**, the RBS **12c**, and the wireless communication path **18c** to the
15 radiotelephone **16c**. The radiotelephone **16c** receives the data message which can include a plurality of names with the initials "KM" and the respective telephone numbers. For the purpose of this example, the data message can include three names and telephone numbers.
20 Each name and respective telephone number can be displayed on the visual display **26c**, and the user can select the desired number, save it in a directory within the radiotelephone, and make a call using the selected number.

25 The network directory data base **22d** can also be supported through a feature node **21d** external to a digital cellular system **10d** as shown in Figure 4. In this example, a call is set up over a voice channel from the radiotelephone **16d** to the feature node **21d**.
30 As shown, the voice channel runs from the radiotelephone **16d** through the radio base station **12d**, the MSC **14d**, and the central office switch ("COS") **19d** to the feature node **21d**. In this example, modems in the radiotelephone **16d** and the feature node **21d** can be
35 used to convert data sent to and from the radiotelephone **16d** and the feature node **21d**. This implementation operates in a manner similar to the

-21-

implementation of Figure 2, and reduces any need to modify a conventional digital cellular system in order to support the network directory database.

A block diagram of operations according to the present invention is illustrated in Figure 5. The cellular system is provided with a network directory database 50, and this network directory database includes a plurality of telephone numbers. In addition, the network directory database can include a plurality of search terms, wherein each of the telephone numbers is associated with one or more respective search terms. The search terms can include first names, last names, middle names, initials, and addresses.

The user can initiate a search of the network directory database by depressing a dedicated function key. The user is then prompted for input of search criteria 52, and this user input is accepted by the cellular radiotelephone 54. A search request data signal is generated in the radiotelephone in response to the input search criteria 56. The search request data signal is preferably an electronic data signal including the search criteria. This search request data signal is sent from the radiotelephone to the cellular system 58.

The information in the network directory database is then searched 60 for a match with the search criteria to identify a subset of the telephone numbers. This search can include the steps of comparing the search criteria from the search request data signal with the search terms, choosing a subset of the search terms which match the search criteria from the search request data signal, and identifying telephone numbers associated with the chosen search terms.

The telephone number or numbers identified in the search are returned to the radiotelephone 62. This

-22-

telephone number (or numbers) can be stored in a memory location of the radiotelephone 64. In addition, if more than one telephone number is returned to the radiotelephone and stored, an individual one of these
5 telephone numbers can be selected, stored in a personal directory in the radiotelephone, and the selected number can be used to place a radiotelephone call. For example, the telephone numbers can be displayed on a visual display on the radiotelephone allowing the user
10 to choose which number to save and/or call. In addition, the returning step can include the step of returning names or other information corresponding to respective telephone numbers which can also be displayed on the visual display of the radiotelephone.
15 As will be understood by those having skill in the art, these operations can be implemented with any of the cellular systems illustrated in Figures 1-4.

In the drawings and specification, there have been disclosed typical preferred embodiments of the
20 invention, and although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims.

-23-

THAT WHICH IS CLAIMED:

1. A method of storing directory information in a cellular radiotelephone, said method comprising the steps of:
 - providing a network directory database
 - 5 in a cellular telephone system, said network directory database comprising a plurality of telephone numbers;
 - prompting for user input of search criteria;
 - accepting user input of said search
 - 10 criteria;
 - generating a search request data signal within said cellular radiotelephone in response to said search criteria, said search request data signal including said search criteria;
 - 15 sending said search request data signal from said cellular radiotelephone to said cellular radiotelephone system;
 - searching said network directory database for a match with said search criteria to
 - 20 identify a subset of said plurality of telephone numbers;
 - returning said subset of said plurality of telephone numbers to said cellular radiotelephone; and
 - 25 storing said subset of said plurality of telephone numbers in said cellular radiotelephone.
2. A method according to Claim 1 wherein said step of sending said search request data signal comprises sending said signal over a digital control
- 30 channel.
3. A method according to Claim 1 wherein; said prompting step comprises prompting for user input of a plurality of items of search criteria;

-24-

said accepting step comprises accepting user input of each of said plurality of items of search criteria;

said generating step comprises
5 generating a separate search request data signal in response to each of said plurality of items of search criteria; and

said sending step comprises sending each of said search request data signals separately.

10 4. A method according to Claim 1 wherein said network directory database further comprises a plurality of search terms, each of said search terms being associated with a respective telephone number, and wherein said step of searching said network
15 directory database comprises the steps of:

comparing at least a portion of said search request data signal with said search terms;

choosing a subset of said plurality of search terms which match said portion of said search
20 request data signal; and

identifying a subset of said plurality of telephone numbers associated with said chosen subset of said plurality of search terms.

5. A method according to Claim 4 wherein
25 one of said search terms is chosen from the group comprising a first name, a last name, a middle name, an initial, and an address for a respective one of said telephone numbers.

6. A method according to Claim 4 wherein
30 said returning step includes returning said subset of search terms to said cellular radiotelephone.

-25-

7. A method according to Claim 1 further comprising the steps of:

selecting an individual telephone number from said subset of telephone numbers; and

5 storing said individual telephone number in a personal directory in said cellular radiotelephone.

8. A method according to Claim 7 further comprising the step of establishing a cellular

10 radiotelephone communication using said individual telephone number.

9. A method according to Claim 7 further comprising the step of displaying said subset of telephone numbers at said cellular radiotelephone.

15 10. A method according to Claim 1 wherein said step of generating said search request data signal further comprises converting said search request data signal to modem signals.

20 11. A cellular radiotelephone comprising:
memory means;

prompting means for prompting a user of said cellular radiotelephone to enter input search criteria;

25 accepting means for accepting said input search criteria;

generating means for generating a search request data signal within said cellular radiotelephone in response to said input search criteria, said search request data signal including said search criteria;

30 transmission means for transmitting said search request data signal from said cellular radiotelephone to a cellular radiotelephone system wherein at least a portion of said search request data

-26-

signal is compared with a network directory database to identify at least one telephone number;

reception means for receiving a return data signal from said cellular radiotelephone system, said return data signal including said telephone number; and

storage means for storing said telephone number in said memory means.

12. A cellular radiotelephone according to Claim 11 wherein said transmission means comprises means for transmitting said search request data signal over a digital control channel.

13. A cellular radiotelephone according to Claim 11 further comprising calling means for establishing a cellular radiotelephone communication using said telephone number in said memory means.

14. A cellular radiotelephone according to Claim 11 wherein said network directory database information includes a plurality of telephone numbers and a plurality of search terms, each of said search terms being associated with a respective telephone number, and wherein said search request data signal is compared with said search terms to locate a subset of said plurality of telephone numbers, and wherein said return data transmission comprises said subset of telephone numbers, and wherein said subset of telephone numbers is stored in said memory means.

15. A cellular radiotelephone according to Claim 14 wherein said return data transmission further comprises a subset of said plurality of search terms, each of said search terms of said subset being associated with a respective telephone number in said

-27-

subset of telephone numbers, and wherein said subset of search terms are stored in said memory means.

16. A cellular radiotelephone according to Claim 14 further comprising means for displaying said
5 plurality of telephone numbers in said memory means.

17. A cellular radiotelephone according to Claim 16 further comprising designation means for designating one of said telephone numbers in said subset and for storing said designated telephone number
10 in a personal directory in said cellular radiotelephone.

18. A cellular radiotelephone according to Claim 17 further comprising calling means for establishing a cellular radiotelephone communication
15 using said designated telephone number.

19. A cellular radiotelephone according to Claim 11 further comprising a modem to convert said search request data signals to modem signals.

20. A cellular radiotelephone system
20 comprising:

a network directory database comprising a plurality of telephone numbers;

reception means for receiving a search request data signal from a cellular radiotelephone,
25 said search request data signal including search criteria generated by said cellular radiotelephone in response to prompts for user input followed by user input of said search criteria;

search means for searching said network
30 directory database for a match with said search criteria to identify a subset of said plurality of said of telephone numbers; and

-28-

transmission means for transmitting a return data signal including said subset of telephone numbers to said cellular radiotelephone.

21. A cellular radiotelephone system
5 according to Claim 20 wherein said search request data signal is received from said cellular radiotelephone over a digital control channel.

22. A cellular radiotelephone system
according to Claim 20 wherein said network directory
10 database further comprises a plurality of search terms, each of said search terms being associated with a respective telephone number, and wherein said search means further comprises:

comparison means for comparing said
15 search criteria with said search terms; and

identification means for choosing a subset of said plurality of search terms which match said search criteria and identifying said subset of telephone numbers such that each of said telephone
20 numbers in said subset is associated with said subset of chosen search terms.

23. A cellular radiotelephone system
according to Claim 22 wherein one of said search terms is chosen from a group consisting of a first name, a
25 last name, a middle name, an initial, and an address for a respective one of said telephone numbers.


24. A cellular radiotelephone system
according to Claim 22 wherein said transmission means further comprises means for transmitting said subset of
30 chosen search terms together with said subset of telephone numbers.

-29-

25. A cellular radiotelephone system according to Claim 20 wherein said search request data signal comprises modem signals, and said search means comprises a modem for converting said modem signals.


1/5

FIG. 1

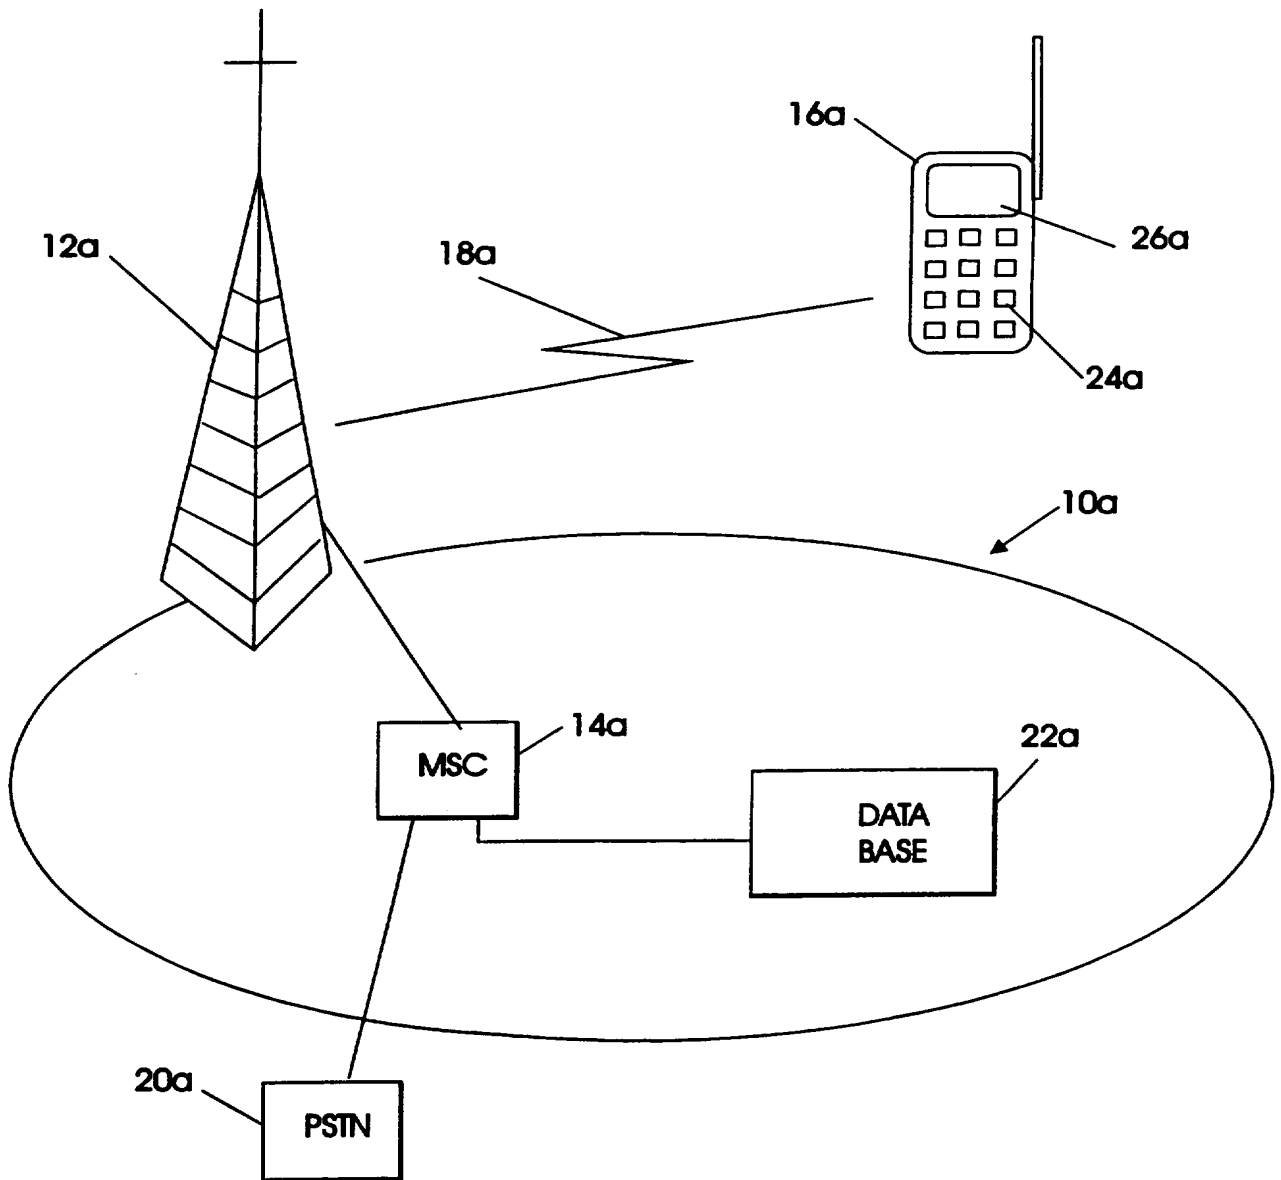

2/5

FIG. 2

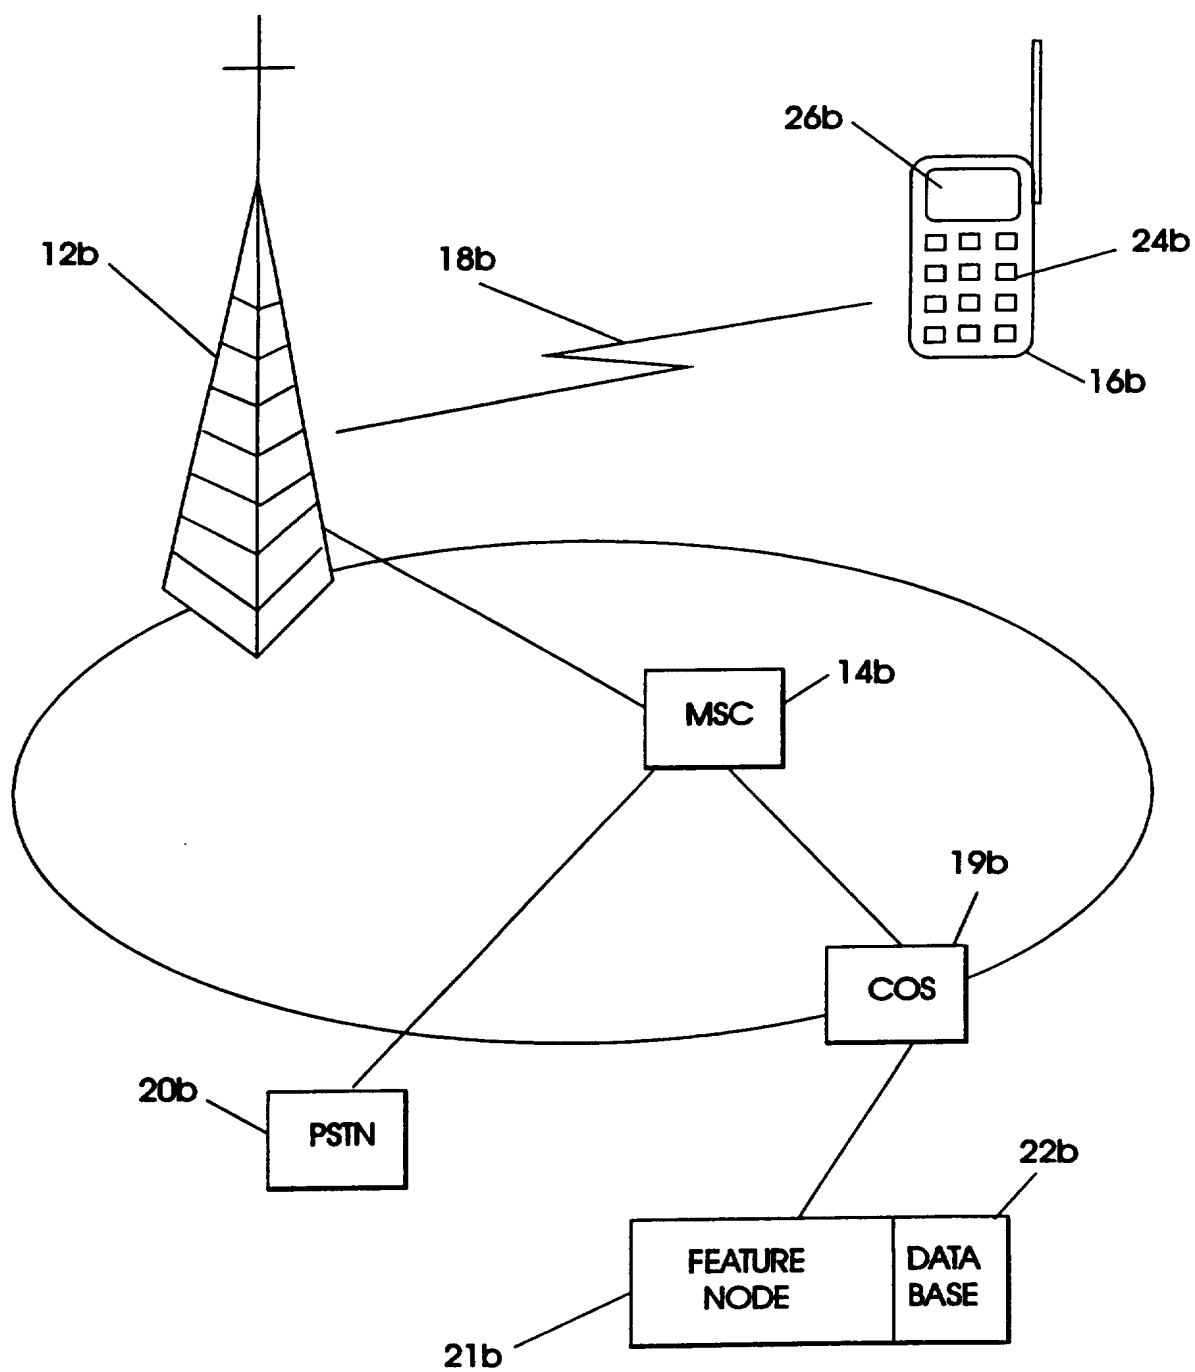

SUBSTITUTE SHEET (RULE 26)

3/5

FIG. 3



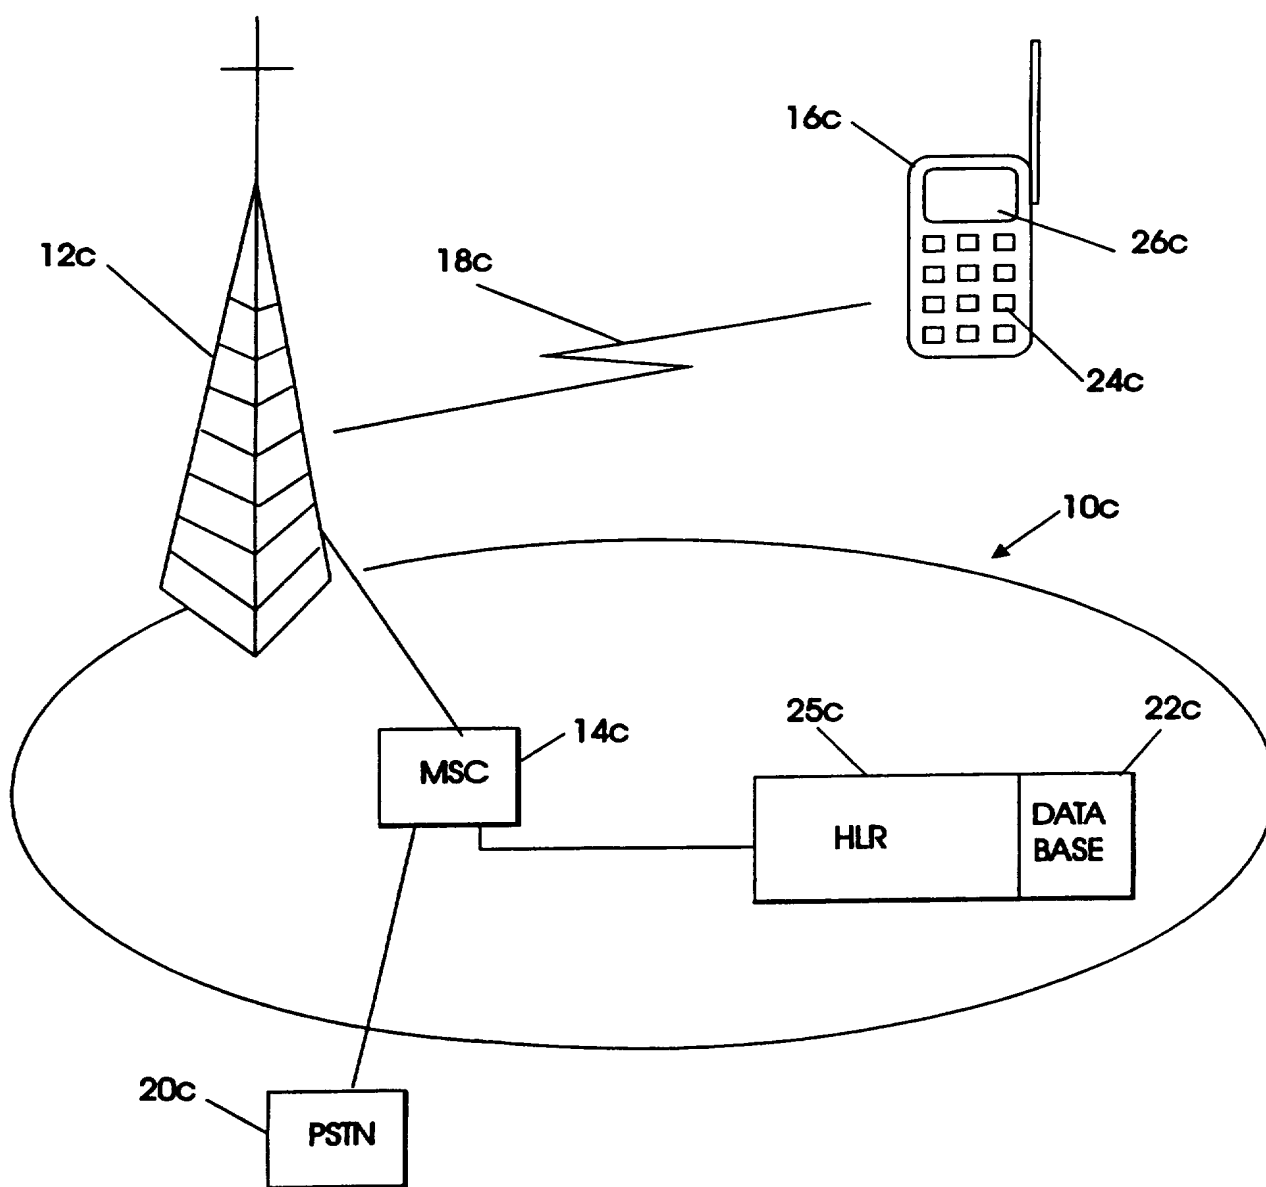


FIG. 4

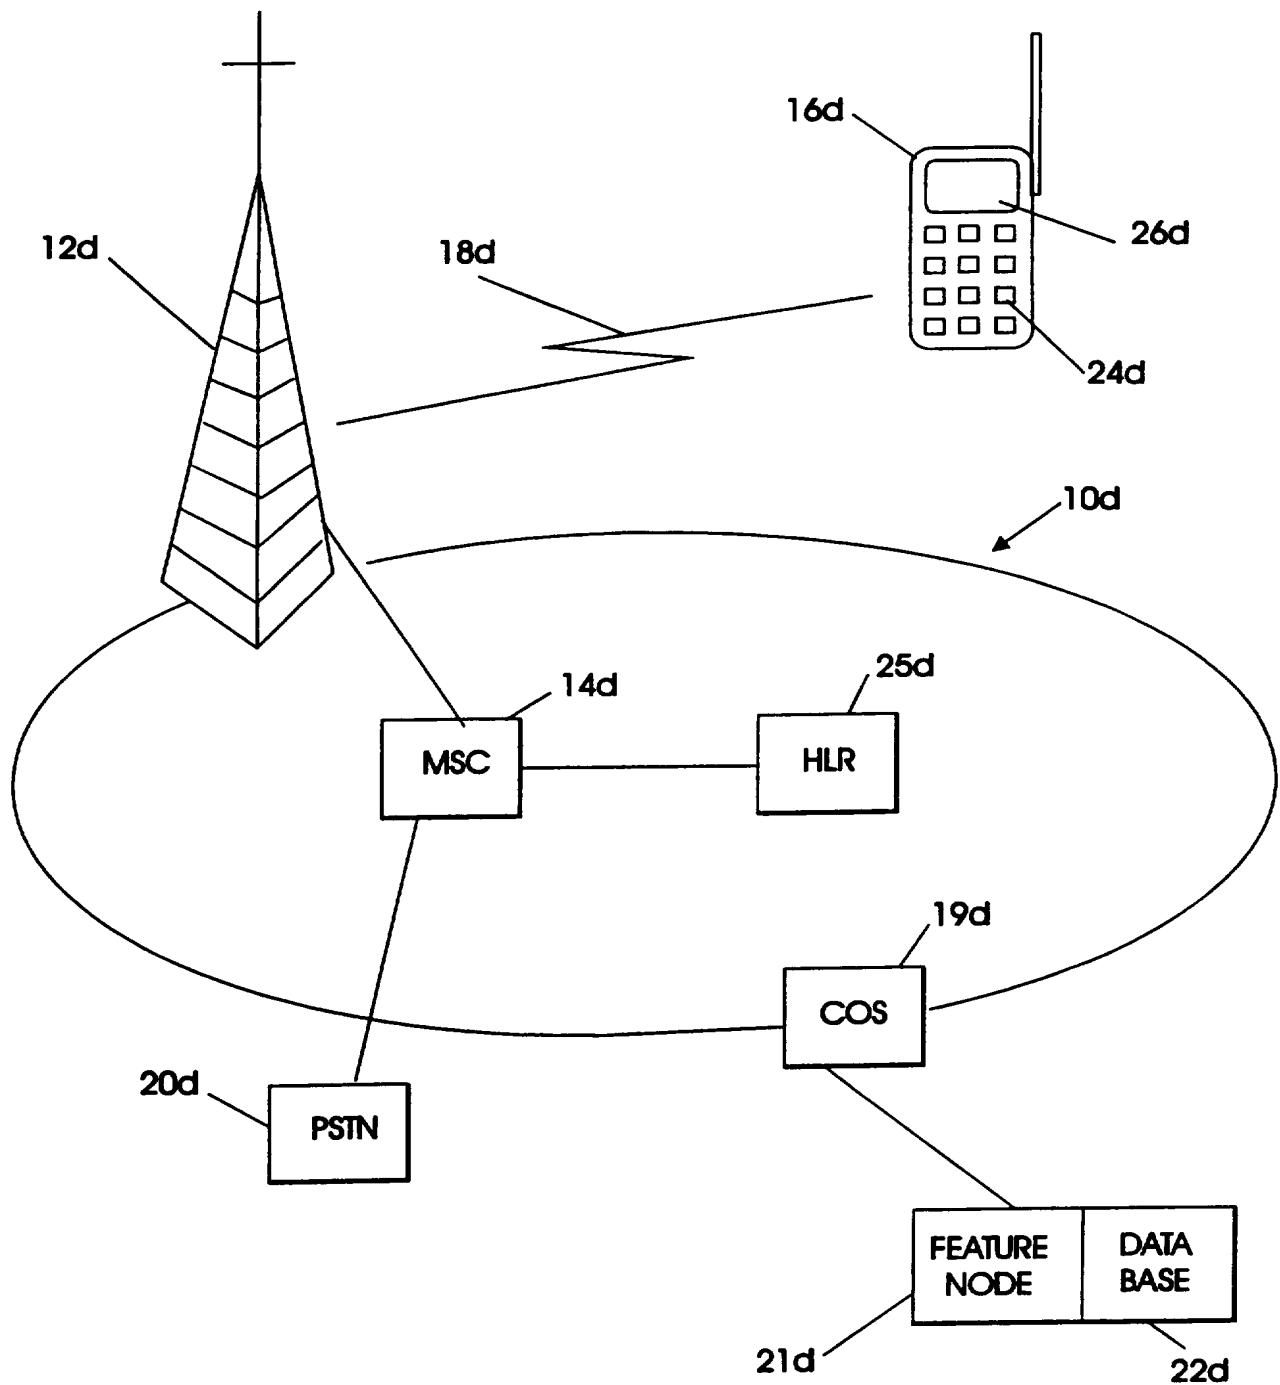

5/5

FIG. 5

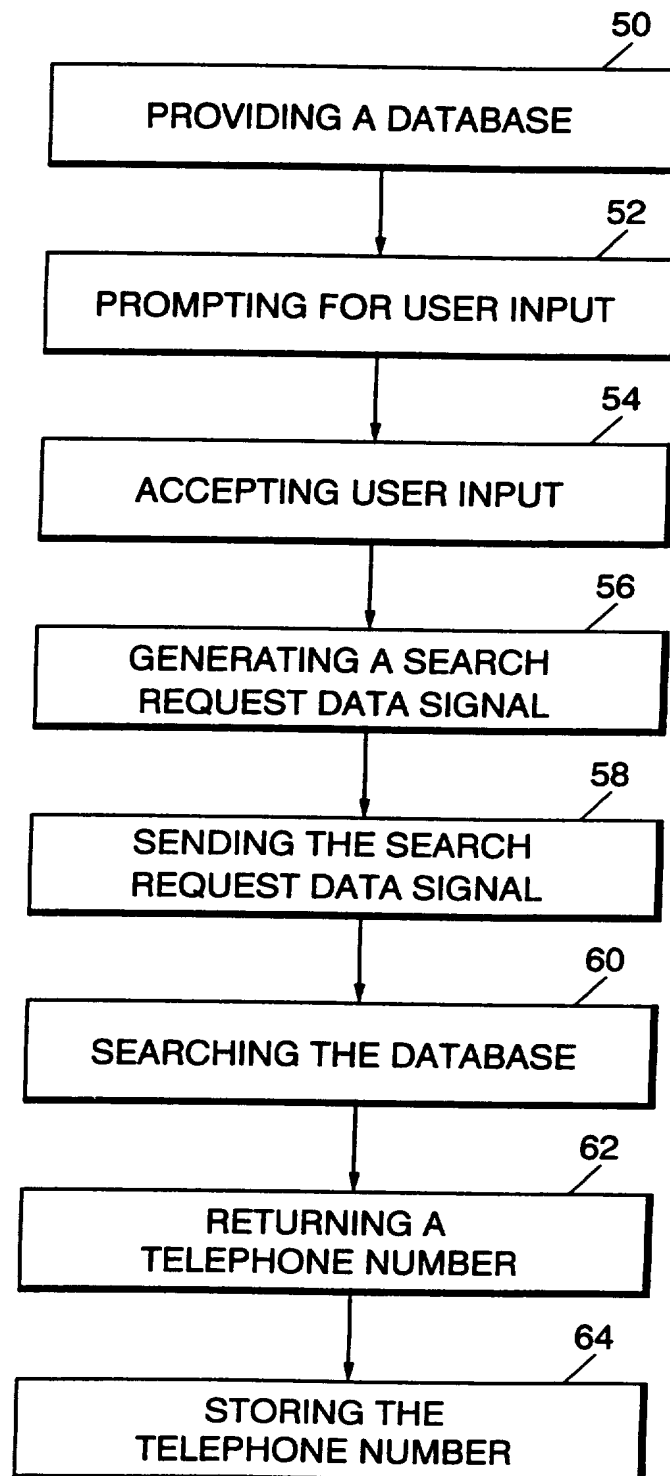

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 96/17245

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/22 H04M3/50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 40 26 179 A (BOSCH GMBH ROBERT) 20 February 1992 see column 2, line 14 - column 2, line 39 ---	1,4,11, 13,14, 20,22
A	DE 36 29 468 A (SIEMENS AG) 3 March 1988 see column 4, line 47 - column 5, line 33 ---	1,3,5, 11,20,23
A	EP 0 457 077 A (ROLM SYSTEMS) 21 November 1991 see column 5, line 52 - column 7, line 30 ---	1,7-9, 11, 16-18,20
A	IBM TECHNICAL DISCLOSURE BULLETIN, vol. 36, no. 10, 1 October 1993, page 605 XP000412502 "METHOD FOR PERFORMING PHONE CALL TO UNKNOWN CALLEES" -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

3 April 1997

Date of mailing of the international search report

10.04.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Schut, G

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/17245

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 4026179 A	20-02-92	NONE	
DE 3629468 A	03-03-88	NONE	
EP 0457077 A	21-11-91	NONE	